



For more information,
please scan this code:



V1600GT

2 PON Ports GPON OLT


Highlights:



Introduction:

The V1600GT is a box-type GPON OLT with two GPON ports that meets flexible and fast FTTx access, suiting the scenarios such as sparse/ remote/cost-sensitive area, smart industrial park, commercial building and FTTM, etc.

Interface Description:

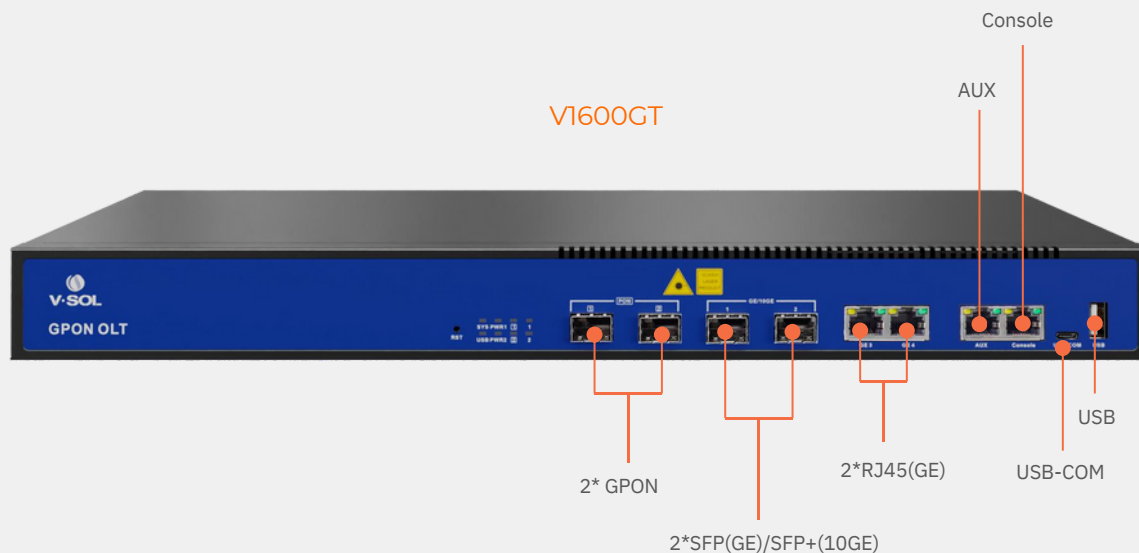

Technical Specifications



Item		V1600GT
Chassis	Rack	1U 19Inch Standard Box
Uplink Port	QTY	4
	RJ45(GE)	2
	SFP(GE)/SFP+(10GE)	2
GPON Port	QTY	2
	Physical Interface	SFP Slots
	Supported PON module level	Class C++/Class C+++ /Class C++++
	Max splitting ratio	1:128
Management Ports		1*10/100/1000BASE-T out-band port, 1*CONSOLE port, 1*USB-COM, 1*USB2.0
Backplane Bandwidth (Gbps)		208
Port Forwarding Rate(Mpps)		40.176
PON Port Specification (Class C+++)	Transmission Distance	20KM
	PON port speed	Upstream 1.244Gbps, Downstream 2.488Gbps
	Wavelength	TX 1490nm, RX 1310nm
	Connector	SC/UPC
	Fiber Type	9/125μm SMF
	TX Power	+4.5~+10dBm
	Rx Sensitivity	≤ -30dBm
	Saturation Optical Power	-12dBm
Power Supply	AC	Working Voltage Range: 100~240V, Rated Voltage: 110V/220V
	DC	Working Voltage Range: -36~-75V, Rated Voltage: -48V/-60V
Management Mode		WEB , Telnet , CLI

Management Function

- Telnet,CLI,WEB;
- Fan Group Control
- Port Status monitoring and configuration management
- Online ONT configuration and management
- User management
- Alarm management

Layer2 Switch

- 16K Mac address
- Support 4096 VLANs
- Support port VLAN
- Support VLAN tag/Un-tag, VLAN transparent transmission
- Support VLAN translation and QinQ
- Support storm control based on port
 - Support port isolation
- Support port rate limitation
- Support 802.1D and 802.1W
- Support static LACP, Dynamic LACP
- QoS based on port, VID, TOS and MAC address
 - Access control list
- IEEE802.x flowcontrol
- Port stability statistic and monitoring

Multicast

- IGMP snooping
- 1K L2 Multicast Groups;

Ordering Information:

- 1K L3 Multicast Groups;
- DHCP
 - DHCP server, DHCP relay, DHCP snooping
 - DHCP option82
- Layer 3 Route
 - ARP proxy
- 16K hardware Host Routes, 1024 hardware Subnet Routes
 - Support static route ;
- IPv6
 - Support NDP;
 - Support IPv6 Ping, IPv6 Telnet, IPv6 routing;
 - Support ACL based on source IPv6 address, destination IPv6 address, L4 port, protocol type, etc;
 - Support MLD v1/v2 snooping (Multicast Listener Discovery snooping)

GPON Function

- Tcont DBA
- Gempport traffic
- In compliant with ITU-T G.984
- Up to 20KM transmission Distance
- Support data encryption, multi-cast, port VLAN, separation, RSTP, etc
- Support ONT auto-discovery/link detection/remote upgrade of software

- Support VLAN division and user separation to avoid broadcast storm
- Support power-off alarm function, easy for link problem detection
- Support broadcasting storm resistance function
- Support port isolation between different ports
- Support ACL to configure data packet filter flexibly
- Specialized design for system breakdown prevention to maintain stable system

Dimension (L*W*H)

- 442mm*200mm*43.6mm

Weight

- Net weight of single power: 2.485kg

Power Consumption

- 35W

Working Temperature

- -20℃ ~+60℃

Storage Temperature

- -40~+70℃

Relative Humidity

- 5~95% (non-condensing)

Product Name	Product Description	Power Configuration	Accessories
V1600GT	2*GPON, 2*GE(RJ45)+2*GE(SFP)/10GE(SFP+)	1*AC power; 1*DC power; 2*AC power; 2*DC power; 1*AC power + 1* DC power.	Class C++ module Class C+++module Class C++++module 1G SFP / 10G SFP+ module