
Manage the use of software


1. First, unzip the compressed package




2. After the decompression is completed, double-click to run the software



3. The STICK_OLT device needs to be connected to a router, switch, or transceiver. A network cable should be connected to the network port of the device to which the STICK_OLT is connected, and the other end should be connected to the network port of the computer. Then, run the management software.

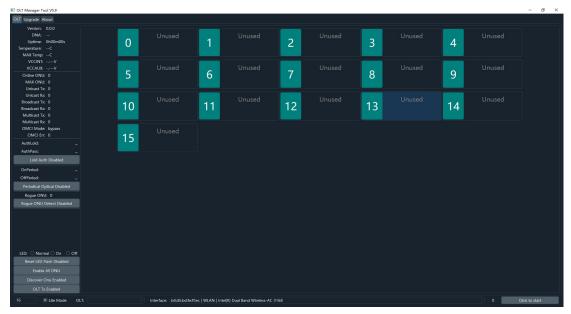

4. Select the network adapter that connects to the computer. Open the management software, select the corresponding network card and Click the Click to start button.

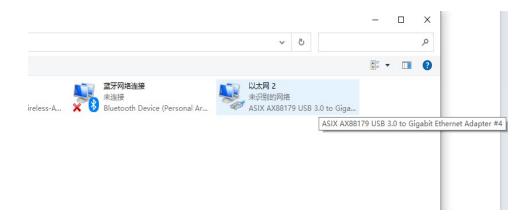



5. After clicking "Start", you can query the connected OLT and the registered ONU.

