

WTS10SRD-S30C

10G SFP+ Transceiver 850nm MMF 300m LC
Data Sheet



Contents

Product Overview

Applications and Compliance

Features

Ordering Information

Absolute Maximum Ratings

Optical Parameters

Electrical Characteristics

Digital Diagnostics

Digital Diagnostics Memory Map

Recommended Interface Circuit

Pin Diagram

Pin Descriptions

Mechanical Specifications

3

3

3

4

4

4

5

5

6

6

7

7

8

| Product Overview

| Applications

- 10GBASE-SR/SW Ethernet
- 1Gb/s, 2Gb/s, 4Gb/s, 8Gb/s and 10Gb/s Fibre Channel
- CPRI Rates 10.138 Gb/s, 9.830 Gb/s
7.373 Gb/s, 6.144 Gb/s, 4.915 Gb/s
2.458 Gb/s, 1.229 Gb/s, 0.614 Gb/s
- Other Optical Links

| Compliance

- SFP MSA
- SFF-8472
- IEEE802.3ae
- ROHS

| Features

- Up to 10.3125Gbps Data Links
- 850nm VCSEL laser transmitter and PIN/TIA receiver
- Maximum link length of 300m on 50/125um MMF OM3
- Hot-pluggable SFP footprint
- Duplex LC receptacles
- Low power dissipation
- RoHS compliant and lead-free
- Support Digital Diagnostic Monitor interface
- Single +3.3V power supply
- Compliant with SFF-8472
- Case operating temperature
Commercial: 0°C to +70°C
Industrial: -40°C to +85°C

Ordering Information

Part No.	Bit Rate (Gbps)	Laser (nm)	Distance (km)	Fiber Type	DDMI	Connector	Temp
WTS10SRD-S30C	10.3125	850	300	MMF	YES	LC	0°C~70°C

Absolute Maximum Ratings

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		3.6	V	
Storage Temperature	TS	-40		85	°C	
Case Operating Temperature	TOP	0		70		Commercial
Relative Humidity	RH	0		85	%	1

Notes: Non-condensing.

Optical Parameters (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Transmitter						
Center Wavelength	λ_c	840	850	860	nm	
Spectral Width (RMS)	Pm			0.85	nm	
Average Output Power	Pavg	-7.8		-1	dBm	
Extinction Ratio	ER	3			dB	
Transmitter OFF Output Power	POff			-30	dBm	
Receiver						
Center Wavelength	λ_c	840		860	nm	
Receiver Sensitivity, Average Power				-11.1	dBm	1
Receiver Saturation Power	Psat			-1	dBm	
Loss of Signal Assert	PA	-30			dBm	
Loss of Signal De-assert	PD			-13	dBm	
LOS Hysteresis	PD- PA	0.5			dB	

Notes: Measured with a PRBS 2³¹-1 test pattern, @10.3125Gb/s, BER<1E-12.

Electrical Characteristics (TOP = 0°C to 70°C, VCC = 3.3 ± 5% Volts)

Parameter	Symbol	Min	Type	Max	Unit	Ref.
Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Supply Current	I _{CC}			300	mA	
Transmitter						
Input differential impedance	R _{in}		100			1
Differential data input swing	V _{in} , pp	200		1000	mV	
Transmit Disable Voltage	V _D	2		V _{CC}	V	
Transmit Enable Voltage	V _{EN}	V _{EE}		V _{EE} +0.8	V	
Receiver						
Differential data output swing	V _{out} , pp	200		1000	mV	2
LOS Fault	V _{LOS_fault}	2		V _{CC}	V	3
LOS Normal	V _{LOS_norm}	V _{EE}		V _{EE} +0.8	V	3
Power Supply Noise Tolerance	V _{CCT} /V _{CCT}	Per SFP MSA			mVpp	


Notes:

1. Connected directly to TX data input pins.AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.


Digital Diagnostics

Parameter	Unit	Accuracy
Case Temperature	°C	±3
Supply Voltage	V	±3%
Tx Bias Current	mA	±10%
Tx Optical Power	dB	±3
Rx Optical Power	dB	±3


Digital Diagnostics Memory Map

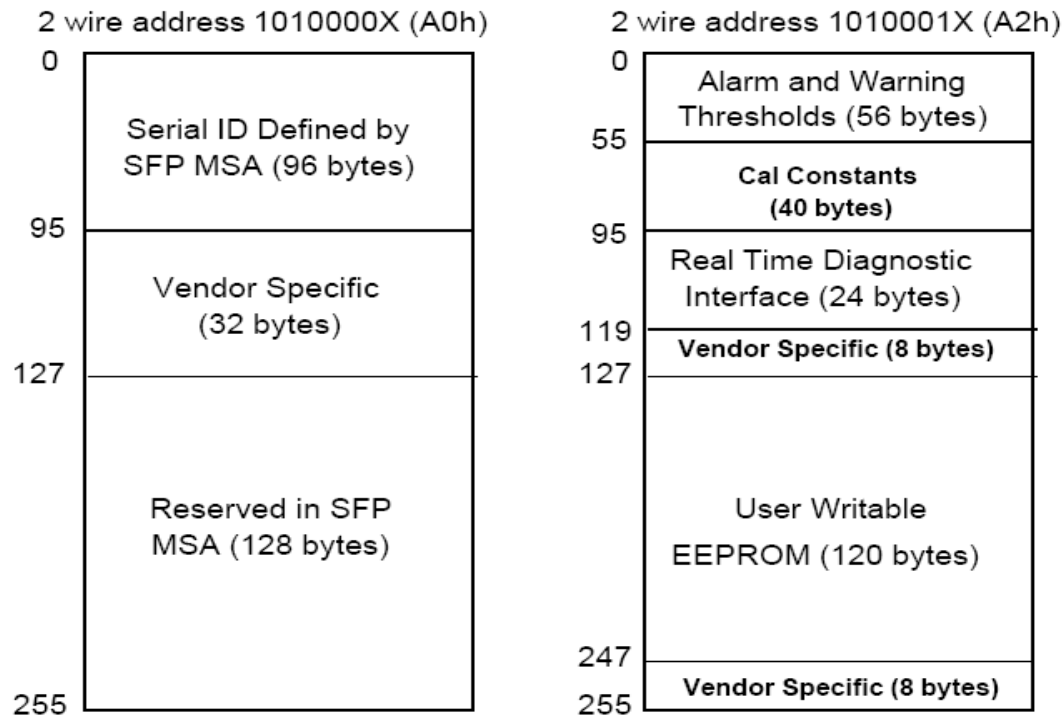

Recommended Interface Circuit

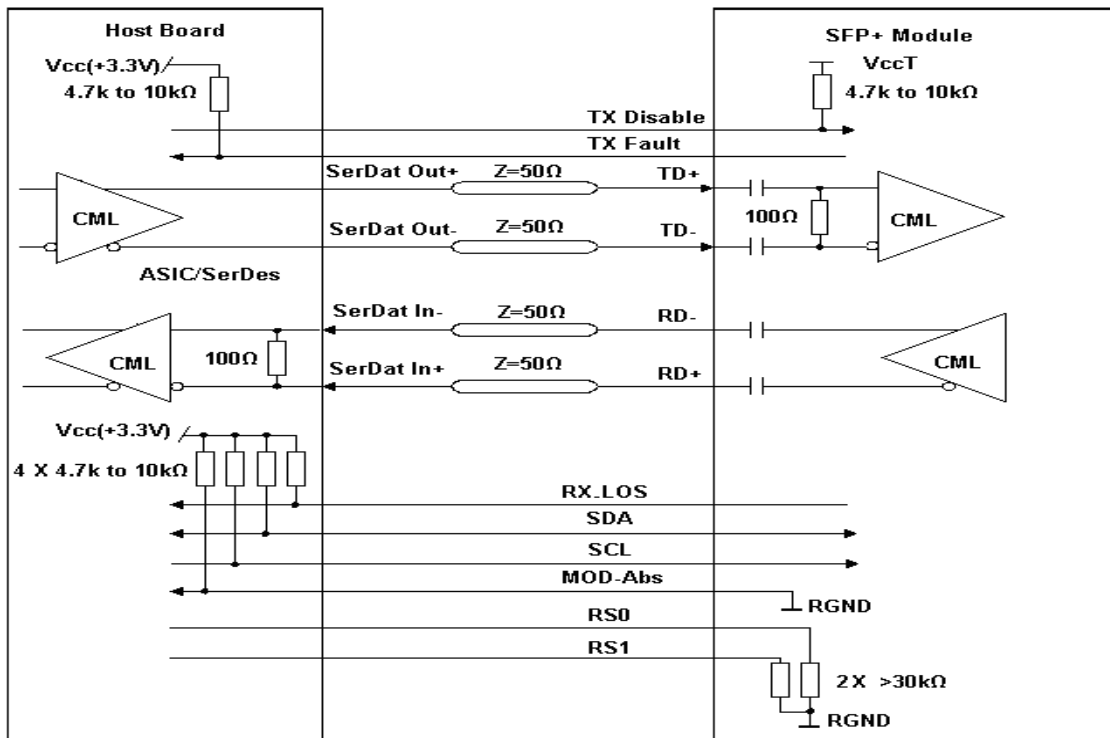

Pin Diagram

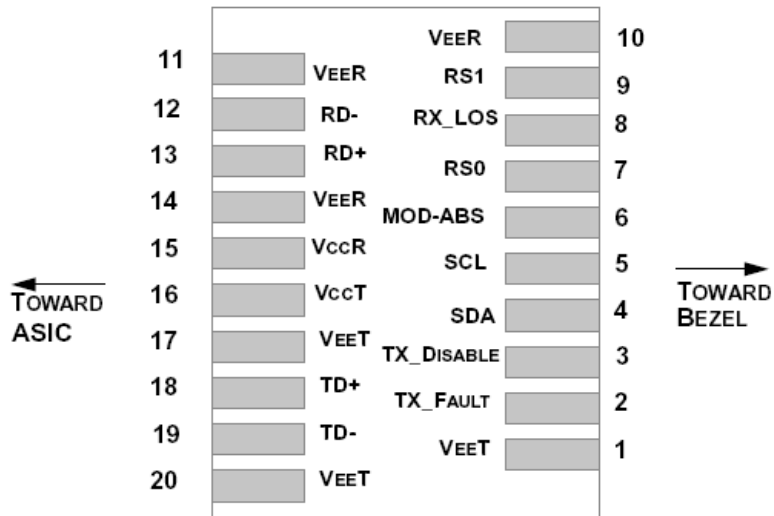

Pinout of Connector Block on Host Board

Pin Descriptions


Pin	Symbol	Name/Description	Ref.
1	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
2	T_{FAULT}	Transmitter Fault.	2
3	T_{DIS}	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	No connection required	
8	LOS	Loss of Signal indication. Logic "0" indicates normal operation.	5
9	RS1	No connection required	
10	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
11	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
15	V_{CCR}	Receiver Power Supply	
16	V_{CCT}	Transmitter Power Supply	
17	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	

19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T_{FAULT} is an open collector/drain output, which is pulled up with a 4.7k Ω – 10k Ω resistor on the host board, but is grounded inside the SFP+ cable plug.
3. Laser output disabled on $T_{DIS} > 2.0V$ or open, enabled on $T_{DIS} < 0.8V$.
4. Should be pulled up with 4.7k Ω – 10k Ω on host board to a voltage between 2.0V and 3.6V. MOD_ABS pull line low to indicate module is plugged in.
5. LOS is open collector output. Should be pulled up with 4.7k Ω – 10k Ω on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Mechanical Specifications

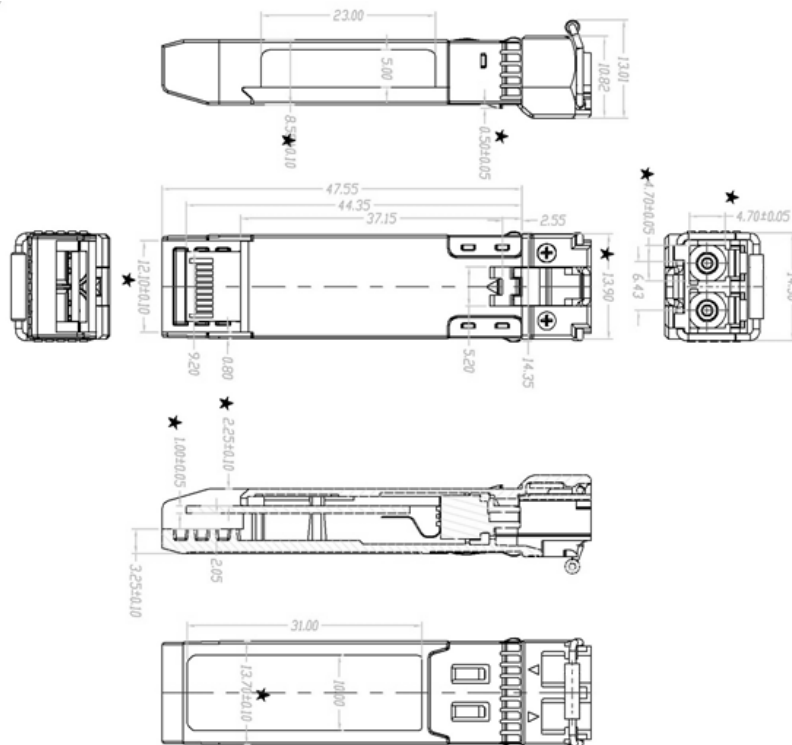

SFP wire mechanical drawing (Unit: mm)